

SERVICE MANUAL

EXCAVATOR

688
Crawler

7-32651

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.

TYPE 1-4

SERVICE MANUAL

EXCAVATOR

688
Crawler

7-32651

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.

TYPE 1-4

SERVICE MANUAL

EXCAVATOR

688
Crawler

7-32651

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.

TYPE 1-4

SERVICE MANUAL

EXCAVATOR

688
Crawler

7-32651

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.

TYPE 1-4

<https://caseih.servicemanual.com>

688 Crawler Excavator

Table of Contents

	SECTION NO.	FORM NO.
1 GENERAL		
Sectional Index		7-32410
Safety, General Information and Torque Specifications	1001	8-86530
Specifications	1002	7-32351
2 ENGINE		
Sectional Index		7-32420
Engine Removal and Installation	2000	8-89000
Radiator and Oil Cooler	2001	8-89010
Cylinder Head and Valve Train	2415	8-24171
Cylinder Block	2425	8-24181
Lubrication System	2445	8-24191
Cooling System	2455	8-24201
Turbocharger	2465	8-25550
Turbocharger Failure Analysis	2565	9-78235
3 FUEL SYSTEM		
Sectional Index		7-32430
Fuel System and Filters	3410	8-24211
Fuel Injection Pump and Drive Gear	3412	8-27080
Fuel Injectors	3413	8-24231
4 ELECTRICAL		
Sectional Index		7-32440
Electrical Schematics and Troubleshooting	4001	8-89021
Battery Testing, Maintenance and Booster Battery Connections	4002	7-32080
Starter Motor	4003	8-89040
Alternator	4004	8-89050
5 TRACK		
Sectional Index		7-32470
Tracks, Rollers and Idlers	5002	7-32130
Track Troubleshooting	5502	7-33730
6 POWER TRAIN		
Sectional Index		7-32450
Drive Motor and Final Drive Transmission	6002	7-32290
Swing Motor and Reduction Gears	6003	7-32230

Reprinted

DON 8-88991 REPLACES DON 8-88990

CASE CORPORATION

Don 8-88991

Printed in England
May 1990

SECTION NO.

FORM NO.


8 HYDRAULICS

Sectional Index		7-32461
Hydraulic Troubleshooting	8001	8-89092
Low Pressure Pump	8002	8-89100
High Pressure Pump and Regulator	8003	8-89110
Attachment Valve Bank	8004	8-89130
Drive Control Valve	8005	7-32120
Option Control Valve	8006	7-32150
Counter Rotation Valve	8007	8-89150
Swing Brake Release Valve	8008	7-32170
Swing Control Valve	8009	7-32250
Anti-Surge Valve	8010	8-89160
Hydraulic Swivel	8011	7-32110
Drive Speed Limiter	8012	8-89230
Drive Brake Release Valve	8013	7-32190
Hand and Foot Valves	8015	8-89170
Hydraulic Oil Tank	8016	8-89080
Attachment Cylinders	8018	7-33600
Hydraulic Pick Hammer Control Valve	8222	7-34230

9 MOUNTED EQUIPMENT

Sectional Index		7-32471
Upperstructure and Turntable Bearing	9001	8-89140
Boom, Dipper and Bucket	9002	7-33620
Servicing the Cab	9004	7-32060


<https://caseih.servicemanual.com>

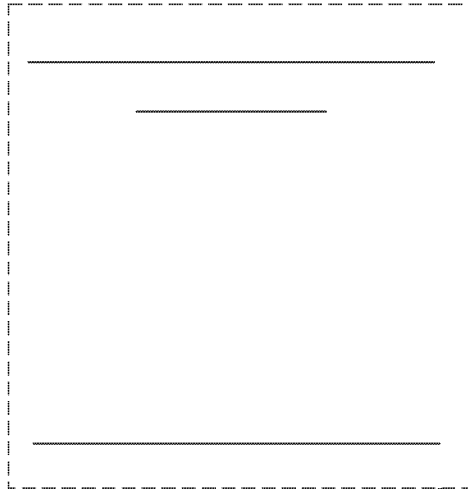

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.




TYPE 1-4

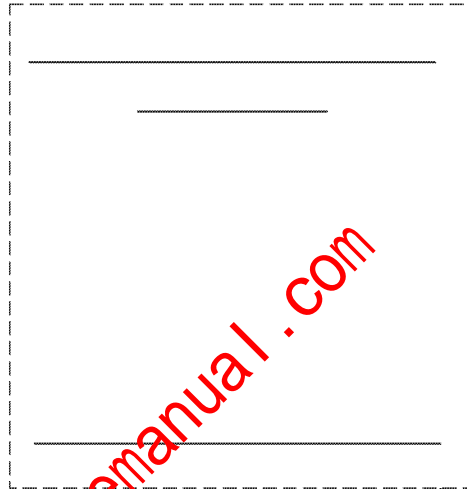

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.




TYPE 1-4

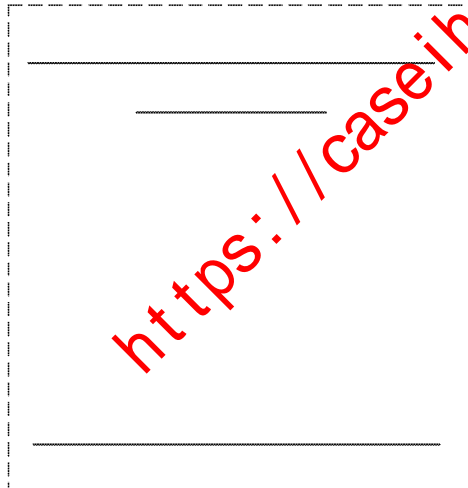

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.



TYPE 1-4

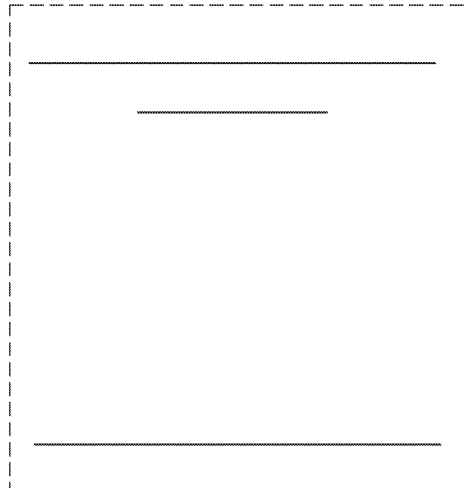

1. Trim along dashed line.
2. Slide into pocket on Binder Spine.



TYPE 1-4

<https://caseinsertivemanual.com>

<https://caseihservicemanual.com>

Section 1001

SAFETY, GENERAL INFORMATION
AND TORQUE SPECIFICATIONS


<https://caseihservicemanual.com>

TABLE OF CONTENTS

SAFETY	3
GENERAL INFORMATION	5
STANDARD TORQUE DATA FOR NUTS AND BOLTS	6
TORQUE DATA FOR HYDRAULIC FITTINGS	7

<https://caseihservicemanual.com>


SAFETY


 *This symbol means ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED. The message that follows the symbol contains important information about safety. Carefully read the message. Make sure you fully understand the causes of possible injury or death.* 1-1 C


To prevent injury always follow the Warning, Caution and Danger notes in this section and throughout the manual.


Put the warning tag shown below on the key for the keyswitch when servicing or repairing the machine. One warning tag is supplied with each machine. Additional tags Part Number 331-4614 are available from your service parts supplier.





 **WARNING: Before starting engine, study Operator's Manual safety messages. Read all safety signs on machine. Clear the area of other persons. Learn and practice safe use of controls before operating.**
It is your responsibility to understand and follow manufacturers instructions on machine operation, service, and to observe pertinent laws and regulations. Operator's and Service Manuals may be obtained from your J.I. Case dealer 45-2


 **WARNING: If you wear clothing that is too loose or do not use the correct safety equipment for your job, you can be injured. Always wear clothing that will not catch on objects. Extra safety equipment that can be required includes hard hat, safety shoes, ear protection, eye or face protection, heavy gloves and reflector clothing** 45-3 A


 **WARNING: Read the operator's manual to familiarize yourself with the correct control functions.** 46-27

 **WARNING: When working in the area of the fan belt with the engine running, avoid loose clothing if possible, and use extreme caution.** 35-4

 **WARNING: Operate the machine and equipment controls from the seat position only. Any other method could result in serious injury.** 48-55

 **WARNING: When doing checks and tests on the equipment hydraulics, follow the procedures as they are written. DO NOT change the procedure.** 47-44

 **WARNING: This is one man machine, no riders allowed.** 35-8

 **WARNING: When putting the hydraulic cylinders on this machine through the necessary cycles to check operation or to remove air from a circuit, make sure all people are out of the way.** 47-45



WARNING: Use insulated gloves or mittens when working with hot parts.

8-10A



CAUTION: Lower all attachments to the ground or use stands to safely support the attachments before you do any maintenance or service.

8-11



CAUTION: Pin sized and smaller streams of hydraulic oil under pressure can penetrate the skin and result in serious infection. If hydraulic oil under pressure does penetrate the skin, seek medical treatment immediately. Maintain all hoses and tubes in good condition. Make sure all connections are tight. Make a replacement of any tube or hose that is damaged or thought to be damaged. **DO NOT** use your hand to check for leaks, use a piece of cardboard or wood.

8-12A



CAUTION: When removing hardened pins such as a pivot pin, or a hardened shaft, use a soft head (brass or bronze) hammer or use a driver made from brass or bronze and a steel head hammer.

8-13



CAUTION: When using a hammer to remove and install pivot pins or separate parts using compressed air or using a grinder, wear eye protection that completely encloses the eyes (approved goggles or other approved eye protectors).

8-14



CAUTION: Use suitable floor (service) jacks or chain hoist to raise wheels or tracks off the floor. Always block machine in place with suitable safety stands.

8-15A



CAUTION: When servicing or repairing the machine. Keep the shop floor and operator's compartment and steps free of oil, water, grease, tools, etc. Use an oil absorbing material and or shop cloths as required. Use safe practices at all times.

8-16



CAUTION: Some components of this machine are very heavy. Use suitable lifting equipment or additional help as instructed in this Service Manual.

8-17



DANGER: Engine exhaust fumes can cause death. If it is necessary to start the engine in a closed place, remove the exhaust fumes from the area with an exhaust pipe extension. Open the doors and get outside air into the area.

8-18



DANGER: When the battery electrolyte is frozen, the battery can explode if (1) you try to charge the battery, or (2) you try to jump start and run the engine. To prevent the battery electrolyte from freezing, try to keep the battery at full charge. If you do not follow these instructions, you or others in the area can be injured.

8-19



DANGER: Batteries contain acid and explosive gas. Explosions can result from sparks, flames or wrong cable connections. To connect the jumper cables correctly to the battery of this machine see the Operator's Manual. Failure to follow these instructions can cause serious injury or death.

GENERAL INFORMATION

CLEANING

Clean all metal parts except bearings, in mineral spirits or by steam cleaning. Do not use caustic soda for steam cleaning. After cleaning dry, and put oil on all parts. Clean oil passages with compressed air. Clean bearings in kerosene, dry the bearings completely and put oil on the bearings.

INSPECTION

Check all parts when the parts are disassembled. Replace all parts that have wear or damage. Small scoring or grooves can be removed with a hone or crocus cloth. Complete visual inspection for indications of wear, pitting and the replacement of parts necessary will prevent early failures.

BEARINGS

Check bearings for easy action. If bearings have a loose fit or rough action replace the bearing. Wash bearings with a good solvent or kerosene and permit to air dry. **DO NOT DRY BEARINGS WITH COMPRESSED AIR.**

NEEDLE BEARINGS

Before you press needle bearings in a bore always remove any metal protrusions in the bore or edge of the bore. Before you press bearings into position put petroleum jelly on the inside and outside diameter of the bearings.

GEARS

Check all gears for wear and damage. Replace gears that have wear or damage.

OIL SEALS, O-RINGS AND GASKETS

Always install new oil seals, o-rings and gaskets. Put petroleum jelly on seals and o-rings.

SHAFTS

Check all shafts that have wear or damage. Check the bearing and oil seal surfaces of the shafts for damage.

SERVICE PARTS

Always install genuine Case service parts, when ordering refer to the Parts Catalog for the correct part number of the genuine Case replacement items. Failures due to the use of other than genuine Case replacement parts are not covered by warranty.

LUBRICATION

Only use the oils and lubricants specified in the Operator's or Service Manual. Failures due to the use of non specified oils and lubricants are not covered by warranty.

STANDARD TORQUE DATA FOR NUTS AND BOLTS

Where no special torque data is specified, the following torque figures should be applied. Threads should be lubricated with engine oil or chassis grease.

TORQUE SPECIFICATIONS \pm 10%									
SIZE	GRADE 8.8			GRADE 10.9			GRADE 12.9		
	lb-ft	Nm	kg/m	lb-ft	Nm	kg/m	lb-ft	Nm	kg/m
5 mm	4	5.5	0.56	5.5	7.5	0.76	6.6	9	0.92
6 mm	6.6	9	0.92	9.2	12.5	1.27	11	15	1.53
8 mm	16.5	22.5	2.3	23	31.5	3.2	26.5	36	3.67
10 mm	32	44	4.5	45	62	6.3	55	75	7.65
12 mm	57	77.5	7.9	81	110	11.2	95	130	13.2
14 mm	88	120	12.2	125	170	17.2	155	210	21.4
16 mm	140	190	19.4	195	265	27	236	320	32.6
18 mm	192	260	26.5	269	365	37.2	320	435	44.3
20 mm	273	370	37.7	383	520	53	457	620	63.2
22 mm	369	500	51	516	700	71.4	619	840	85.6
24 mm	471	640	65.2	665	900	92	796	1080	110
27 mm	702	950	97	996	1350	137.7	1195	1620	165.2
30 mm	955	1300	132.5	1328	1800	183.6	1593	2160	220.3

TORQUE DATA FOR HYDRAULIC FITTINGS

FITTINGS, CONNECTIONS AND PLUGS

Diameter x Pitch	Newton / Metres	Pounds / Feet	Kilogram / Metres
10 mm x 1	20	14.5	2
12 mm x 1.5	35	26	3.6
14 mm x 1.5	45	33.2	4.6
16 mm x 1.5	60	44	6.1
18 mm x 1.5	70	51	7.1
22 mm x 1.5	100	73	10.2
27 mm x 2	200	147	20.4
33 mm x 2	280	207	28.6
42 mm x 2	380	281	38.8

NUTS FOR TUBES AND HOSES

Diameter x Pitch	Newton / Metres	Pounds / Feet	Kilogram / Metres
16 mm x 1.5	20	14.5	2
18 mm x 1.5	35	26	3.6
20 mm x 1.45	45	33.2	4.6
24 mm x 1.5	60	44	6.1

FLANGES

Diameter x Pitch	Newton / Metres	Pounds / Feet	Kilogram / Metres
8 mm x 1.5	28	21	2.9
10 mm x 1.5	55	41	5.6
12 mm x 1.75	90	67	9.2
14 mm x 2	145	107	14.8
16 mm x 2	230	170	23.5

<https://caseihservicemanual.com>

Section 1002

1002

SPECIFICATIONS

For 658 Crawler Excavators

<https://caseihservicemanual.com>

TABLE OF CONTENTS



MODEL AND PIN NUMBER	3
GENERAL SPECIFICATIONS	
Capacities	4
Drawbar Pull	4
Drive Speed	4
Electrical System	4
Fluids and Lubricants	5
Fuel	5
Hydraulic System	6
Tracks, Rollers and Idlers	7
Weights	7
ENGINE SPECIFICATIONS	
IMPORTANT: <i>This engine was made using the metric measurement system. All measurements and checks must be made with metric tools to make sure of an accurate reading when inspecting parts.</i>	
Run-In Instructions	8
Engine Cooling System	9
Engine Lubrication	9
General Engine Specifications	
General	10
Pistons and Connecting Rods	10
Main Bearings	10
Engine Lubricating System	10
Fuel System	11
Detailed Engine Specifications	
Cylinder Block	12
Service Cylinder Sleeves	12
Pistons	12
Piston Pins	12
Piston Rings	13
Cylinder Head	13
Lifters	13
Connecting Rods	13
Crankshaft	14
Camshaft	15
Turbocharger	15
Gear Train	15
Rocker Arm Assembly	15
Intake Valves	16
Exhaust Valves	16
Valve Springs	16
Special Torques	17
GENERAL DIMENSIONS	20
TRANSPORT DIMENSIONS	21

<https://caseih.servicemanual.com>

MODEL AND PIN NUMBERS

When ordering parts or when requesting information or assistance, always give the identification numbers of your machine.

Write the model and PIN numbers of your machine on the lines below.

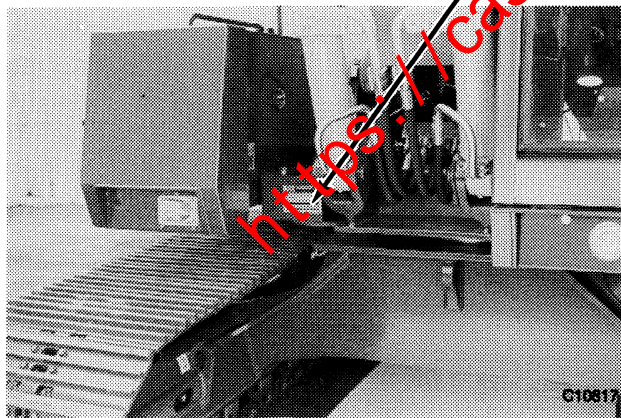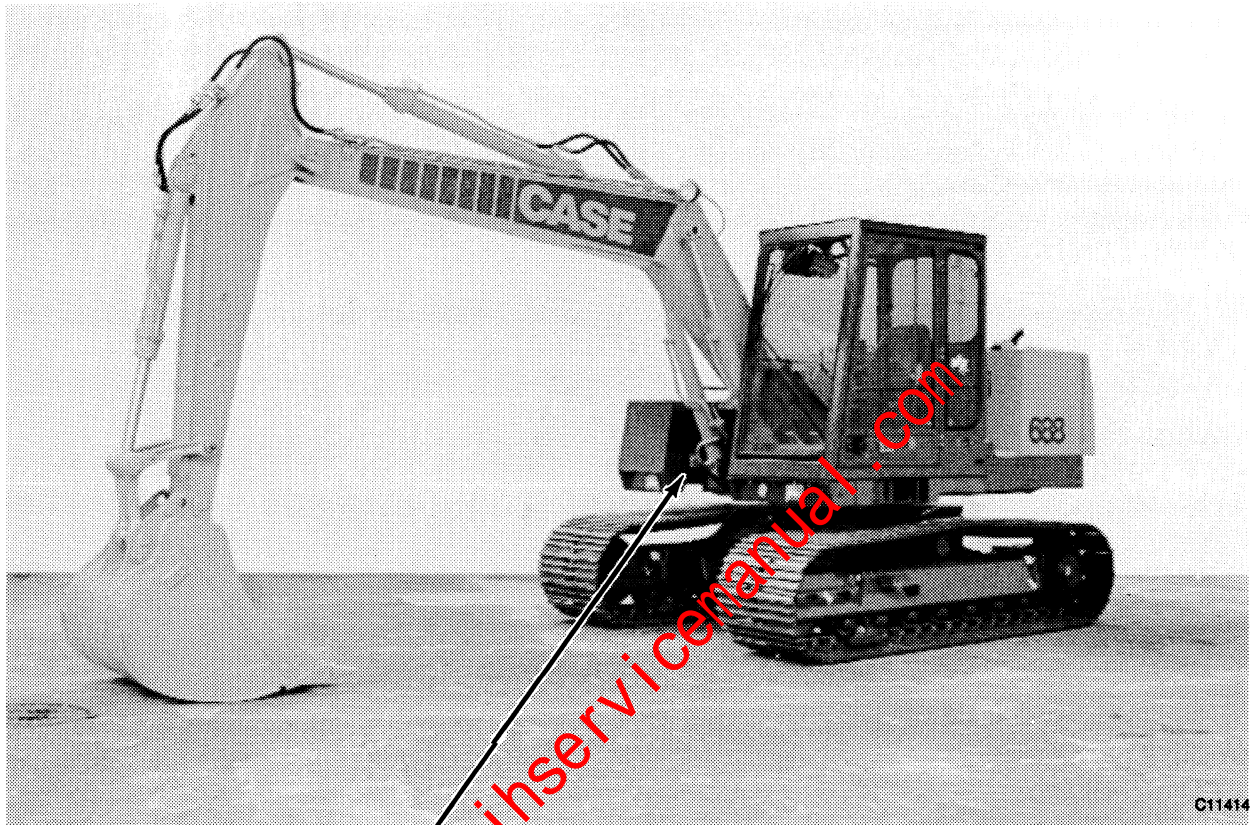

Machine Model Number _____

Machine PIN Number _____

Engine Serial Number _____

High Pressure Pump Serial Number _____

Low Pressure Pump Serial Number _____

Final Drive Serial Number:

Right Hand Side _____

Left Hand Side _____

GENERAL SPECIFICATIONS

Capacities

Engine Oil Capacity (with filter change)	10.5 litres	2.77 US gallons
Engine Cooling System (with cab heater)	14 litres	3.7 US gallons
Fuel Tank	247 litres	65 US gallons
Hydraulic Oil Tank Capacity	100 litres	26.3 US gallons
Total Hydraulic System Capacity	155 litres	40.9 US gallons
Final Drive Transmission Capacity (each side)	1.5 litres	1.6 US quarts
Swing Reduction Gear Capacity	3.5 litres	3.7 US quarts
Track Front Idlers	0.25 litres	0.26 US quarts
Track Lower Rollers	0.26 litres	0.28 US quarts

NOTE: These capacities are only a guide to the quantities. Always use the dipstick, sight gauge or level plug to make sure that fluid levels are correct.

Drawbar Pull

Drawbar Pull	101050 N	22725 lb
--------------------	----------	----------

Drive Speed

Drive Speed	3.5 kph	2.17 mph
-------------------	---------	----------

Electrical System

Type of System	24 volts, negative ground
----------------------	---------------------------

Alternator

Manufacturer	Bosch
Output	28 volts at 45 amperes
Resistance of rotor winding	9.0 ohms
Resistance of stator winding	0.22 ohms
Minimum brush length	14 mm (0.55 inch)

Batteries

Number of batteries required	2
Voltage of each battery	12 volts
Reserve capacity	160 minutes
Cold cranking capacity at -17°C (0°F)	800 amperes
Load for capacity (load) test	400 amperes

Starter Motor

Manufacturer	Bosch
No load test at 27°C (80°F)	
volts	23 volts
current draw	85 amperes maximum
armature speed	7000 rpm minimum
Brush length	8.5 mm (0.3125 inch) minimum
Armature run-out	0.03 mm (0.001 inch) maximum
Commutator diameter	42.5 mm (1.74 inch) minimum
Armature end play	0.05 to 0.4 mm (0.002 to 0.15 inch)

Fluids and Lubricants

Batteries	add drinking or distilled water
Engine Coolant Solution	refer to page 9
Engine Lubrication	refer to page 9
Fuel	refer to the entry on this page
Hydraulic Oil	Case hydraulic excavator fluid (MS 1230)
Final Drive Transmission Lubricant	Case IH 135-H EP gear lubricant or a gear lubricant API GL-5 (SAE 85W-140)
Swing Reduction Gear Lubricant	Case IH 135-H EP (gear lubricant) or a gear lubricant API GL-5 (SAE 85W-140)
Track Roller and Front Idler Lubricant	Case IH No. 1 Single Grade engine oil SAE 80
Turntable Ring Gear Lubricant	Case IH molydisulfide grease
Grease Fitting Lubricant	Case IH molydisulfide grease

Fuel

Use a good grade of Number Two diesel fuel.

Specifications for Acceptable Number Two Diesel Fuel:

API Gravity (minimum)	30
Flash Point (minimum)	52°C 125°F
Cloud Point (Wax Appearance Point) (maximum)	-2°C -5°F
Pour Point (maximum)	5°C (10°F) Temperature
Distillation Temperature, 90% Point	282 to 329°C 540 to 625°F
Viscosity at 38°C (100°F)	
Centistokes	2.0 to 4.3
Saybolt Seconds Universal	32 to 40
Cetane Number (minimum)	40 (45 to 55 for winter or high altitudes)
Water and Sediment by Volume (maximum)	0.05 of 1%
Sulfur by Weight (maximum)	0.50 of 1%
Copper Strip Corrosion (maximum)	Number 3
Ash by Weight (maximum)	0.01 of 1%

<https://caseinservicemanual.com>